
Safety Mat System SM..



SM.

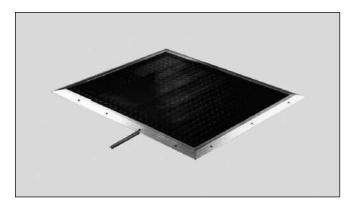

- Safety Category 3 in conjunction with MT1-D or NT1/2-D safety relay according to EN 954-1
- Expected mechanical life of over one million cycles
- Mat integrity monitoring
- Manual or automatic restart
- Customized dimensions
- Slip-free covering
- Easy screw mounting
- Approvals: TÜV NORD

Ordering Kev

Product Description

The safety mat SM.. along with the respective safety module NT1/2-D or MT1-D, constitutes a heavy duty safety system of Safety Category 3, in conformity with European Machinery Directive, EN 954-1 and EN 1760-1 Standards. The safety mat operates like a normal open switch, stopping the dangerous machinery any time it detects the presence of an operator within the controlled area. The same happens in case of failure of the mat or of the anomaly in the system.

<u> </u>	••••••
Safety Mat	
Number of single unit constituting the whole mat _	
Dimensions	
Other specifications ———	

General Specifications

Material	PVC + thermoplastic rubber	Resolution	11 mm
Covering	Antislip	Dead zone	
Covering stiffness	≈ 70SH	(fixing trim excluded)	30 mm
		Weight	≈ 9 Kg/m²

Electrical Specifications

Internal resistance	Inside layer resistance: 1÷5 Ω	Mat integrity monitoring	Yes (with MT1-D or NT1/2-D)
	Layer to layer resistance: >10 M Ω (mat not operated) 1÷5 Ω (mat operated)	Mat response time	<150ms (SM+MT1-D) <150ms (SM+NT1/2-D)

Environmental Specifications

Operating temperature

0 ÷ + 50°C

Storage temperature

-5 ÷ + 55°C

CARLO GAVAZZI


Mechanical Specifications

Actuating force (N / Ø 80 mm)	< 300	Protection degree	IP 65 (IP 67 upon request)
Max actuating stroke	< 6 mm	Dimensions	Upon request
Permissible load not		Fixing trim	Aluminium profile
continuous and non caused	100 Kg/cm ²	Floor fixing	With screws
by object fall		Output connection	PVC cable, $L = 6 m$
Thickness	15 mm		connector ILME CKM04
Mechanical life	> 3x10 ⁶ swithcing cycles		

Chemical Resistance Specifications

Oils	Good	Gasoline	Poor
Greases	Good	Detergents	Poor
Water	Excellent	Alcohol	Poor
Diluted Acids	Good	Abrasive Powder	Good
Solvents	Poor		

Dimensions

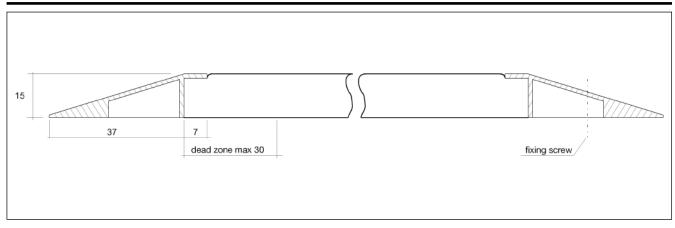

Wiring Diagrams

