

Energy Management

Energy Meter

Type EM23 DIN

CARLO GAVAZZI



- Certified according to MID Directive, Annex "B" + Annex "F" for legal metrology relevant to active electrical energy meters (see Annex MI-003), see option "PF" below.

- Class 1 (kWh) according to EN62053-21
- Class B (kWh) according to EN50470-3
- Class 2 (kvarh) according to EN62053-23
- Accuracy ± 0.5 RDG (current/voltage)
- Energy meter
- Instantaneous variables readout: 3 DGT
- Energies readout: 6+1 DGT
- System variables: W, var, Phase-sequence.
- Single phase variables: A
- Energy measurements: total kWh and kvarh
- TRMS measurements of distorted sine waves (voltages/currents)
- Self power supply
- 1 pulsating output
- Dimensions: 4-DIN modules
- Protection degree (front): IP50
- Easy connections management
- Certified according to MID Directive, "Annex B". "Type Examination" relevant to active electrical energy meters (see Annex MI-003), see option "P" below

Product Description

Three-phase energy meter with built-in configuration joystick and LCD data displaying; particularly indicated for active and reactive energy metering and for cost allocation. Housing for DIN-rail mounting with IP50

(front) protection degree. Direct connection up to 65A. Moreover the meter is provided with one pulsating output proportional to the active energy being measured.

How to order **EM23 DIN AV9 3 X O1 P**

Model _____
 Range code _____
 System _____
 Power supply _____
 Output _____
 Option _____

Type Selection

| Range codes | System | Output | Power supply |
|---|---|--|---|
| AV2: 400V _{LL} AC 10(65)A (direct connection) (**) V _{LN} : 113V to 265V _{LN} V _{LL} : 196V to 460V _{LL} | 3: Balanced and unbalanced load: 3-phase, 4-wire; 3-phase, 3-wire; | O1: Open collector type (single pulse output) | X: Self power supply -15% +20% of the rated measuring input voltage, 45 to 65 Hz |
| AV9: 400V _{LL} AC - 10(65)A (direct connection) (*) V _{LN} : 184V to 276V _{LN} V _{LL} : 318V to 480V _{LL} | | | |

Options

- X:** none
P: Certified according to MID Directive, Annex "B" "Type examination" relevant to active electrical energy meters (see Annex MI-003) (*)
PF: Certified according to MID Directive, Annex "B" + Annex "F" for legal metrology relevant to active electrical energy meters (see Annex MI-003) (**)

(*) as standard.
 (**) on request.

Input specifications

| | | | |
|-------------------------------------|--|----------------------------------|---|
| Rated inputs | System type: 3 | Display | 2 lines (1 x 7 DGT; 1 x 3DGT) |
| Current type | By direct connection | Type | LCD, h 9mm |
| Voltage | AV2: 133/230 V _{LN} AC 230/400 V _{LL} AC AV9: 230 V _{LN} /400 V _{LL} AC AV2 and AV9: 10 (65)AAC | Instantaneous variables read-out | 3 DGT |
| Current range (direct) | AV2 and AV9: 10 (65)AAC | Energies | Imported: 6+1DGT or 7DGT; |
| Accuracy (Display) | Ib: see below, Un: see below | Overload status | EEE indication when the value being measured is exceeding the "Continuous inputs overload" (maximum measurement capacity) |
| (@25°C ±5°C, R.H. ≤60%, 48 to 62Hz) | | | Max. instantaneous variables: 999; energies: 999 999.9 or 9 999999. |
| AV2 model | Ib: 10A, I _{max} : 65A; Un: 113 to 265V _{LN} (196 to 460V _{LL}) | Max. and Min. indication | Min. instantaneous variables: 0; energies 0.0 |
| AV9 model | Ib: 10A, I _{max} : 65A; Un: 184 to 276V _{LN} (318 to 480V _{LL}) | | |
| Current (AV2, AV9) | From 0.004Ib to 0.2Ib: ±(0.5% RDG +3DGT). From 0.2Ib to I _{max} : ±(0.5% RDG +1DGT). | LEDs | Red LED (Energy consumption), 0.001 kWh by pulse Max frequency: 16Hz according to EN50470-1 |
| Phase-neutral voltage | In the range Un: ±(0,5% RDG +1DGT) | Measurements | See "List of the variables that can be connected to:" TRMS measurements of distorted wave forms. |
| Phase-phase voltage | In the range Un: ±(1% RDG +1DGT) | Method | Direct |
| Active power | ±(1%RDG +2DGT) | Coupling type | Direct |
| Reactive power | ±(2%RDG +2DGT) | Crest factor | Ib 10A ≤4 (91A max. peak) |
| Active energy | Class 1 according to EN62053-21 and Class B according to EN50470-3 | Current Overloads | |
| Reactive energy | Class 2 according to EN62053-23 | Continuous | 65A, @ 50Hz |
| AV2, AV9 models | Ib: 10A, I _{max} : 65A; 0.1 Ib: 1A, Start up current: 40mA | For 10ms | 1920A max, @ 50Hz |
| Energy additional errors | | Voltage Overloads | |
| Influence quantities | According to EN62053-21, EN62053-23 and EN50470-1-2 | Continuous | 1.2 Un |
| Temperature drift | ≤200ppm/°C | For 500ms | 2 Un |
| Sampling rate | 1600 samples/s @ 50Hz 1900 samples/s @ 60Hz | Input impedance | |
| Display refresh time | 750 msec. | Voltage (AV2, AV9) | Refer to "Power Consumption" |
| | | Current (AV2, AV9) | < 4VA |
| | | Frequency | 45 to 65 Hz |
| | | Joystick | For variable selection. |

Output specifications

| | | | |
|------------------------|---|----------------------|---|
| Digital outputs | | Static output | |
| Pulse type | | Purpose | For pulse output |
| Number of outputs | 100 pulses per kWh (0.01kWh/pulse). | Signal | V _{ON} 1.2 VDC/ max. 100 mA V _{OFF} 30 VDC max. |
| Type | Output connected to the active energy (kWh) | Insulation | By means of optocouplers, 4000 VRMS between output to measuring inputs. |
| Pulse duration | ≥100ms < 120msec (ON), ≥120ms (OFF), according to EN62052-31 | | |

Software functions

| | | |
|---|--|--|
| System selection System 3-Phase unbalanced load | 3-phase (4-wire); 3-phase (3-wire). | Both energy and power measurements are independent from the current direction. The displayed energy is always "imported" |
| Displaying | Up to 3 variables per page | |
| Easy connection function | Automatic phase sequence detection with current and voltage synchronisation. | |

General specifications


| | | | |
|---|---|---|---|
| Operating temperature | -25°C to +55°C (-13°F to 131°F) (R.H. from 0 to 90% non-condensing @ 40°C) according to EN62053-21, EN62053-23 and EN50470-1 | Standard compliance Safety | IEC60664, IEC61010-1 EN60664, EN61010-1 EN62052-11, EN50470-1 EN62053-21, EN62053-23, EN50470-3. MID "Annex MI-003" DIN43864, IEC62053-31 CE - MID according to "Annex B" (EC type certificate) |
| Storage temperature | -30°C to +70°C (-22°F to 158°F) (R.H. < 90% non-condensing @ 40°C) according to EN62053-21, EN62053-23 and EN50470-1 | Metrology | |
| Installation category | Cat. III (IEC60664, EN60664) | Pulse output Approvals | |
| Insulation (for 1 minute) | 4000 VRMS between measuring inputs and digital output | Connections Cable cross-section area | Screw-type Max. 16 mm ² Min. 2.5 mm ² (measuring inputs); Min./Max. screws tightening torque: 1.7 Nm / 3 Nm Output terminals: 1.5 mm ² Min./Max. screws tightening torque: 0.4 Nm / 0.8 Nm |
| Dielectric strength | 4000 VRMS for 1 minute | Housing DIN Dimensions (WxHxD) Material | |
| Noise rejection CMRR | 100 dB, 48 to 62 Hz | Mounting | |
| EMC Electrostatic discharges Immunity to irradiated Electromagnetic fields Burst Immunity to conducted disturbances Surge Radio frequency suppression | According to EN62052-11 15kV air discharge; Test with current: 10V/m from 80 to 2000MHz; Test without any current: 30V/m from 80 to 2000MHz; On current and voltage measuring inputs circuit: 4kV 10V/m from 150KHz to 80MHz On current and voltage measuring inputs circuit: 4kV. According to CISPR 22 | Protection degree Front Screw terminals Weight | 71 x 90 x 64.5 mm Nylon PA66, self-extinguishing: UL 94 V-0 DIN-rail IP50 IP20 Approx. 400 g (packing included) |

Power supply specifications


| | | |
|--|--|--|
| Self supplied version AV2 model AV9 model | -15% +15% of Un, 48-62Hz. -15% +20% of Un, 48-62Hz. | in a 3-phase system with neutral may work also if one or two phases are missing. |
| Note | The instrument provided with "O1" option, working | |
| | | Power consumption ≤20VA/1W |

Accuracy (according to EN50470-3 and EN62053-23)

kWh, accuracy (RDG) depending on the current

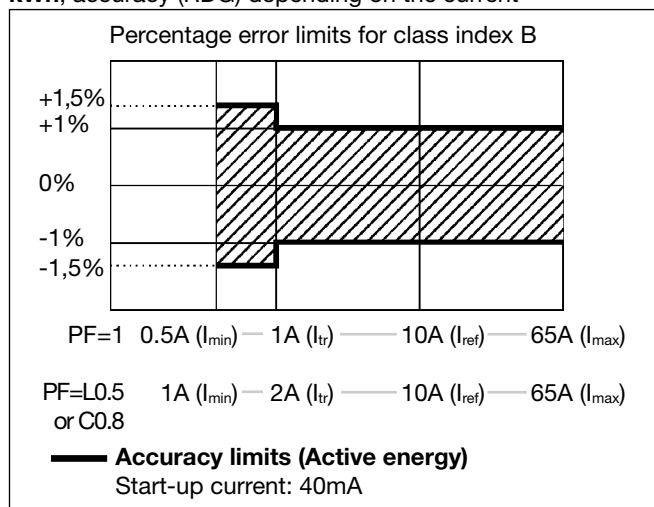

kvarh, accuracy (RDG) depending on the current

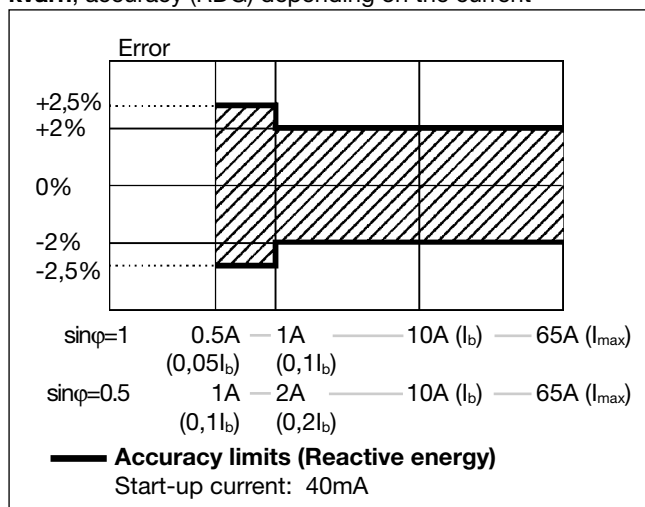

MID "Annex MI-003" compliance

Accuracy

0.9 $U_n \leq U \leq 1.1 U_n$;
0.98 $f_n \leq f \leq 1.02 f_n$;
 f_n : 50 or 60Hz;
 $\cos\varphi$: 0.5 inductive to 0.8 capacitive.
Class B
 I_{st} : 0.04A;
 I_{min} : 0.5A;
 I_{tr} : 1A;
 I_{max} : 65A.

Operating temperature

-25°C to +55°C (-13°F to 131°F) (R.H. from 0 to 90% non-condensing @ 40°C)

EMC compliance

E2

List of the available variables

| No | Variable | 3-ph. 4-wire bal. system | 3-ph. 4-wire unbal. system | 3 ph. 3-wire bal. system | 3 ph. 3-wire unbal. system | Notes |
|----|------------|--------------------------|----------------------------|--------------------------|----------------------------|------------|
| 1 | A L1 | x | x | x | x | |
| 2 | A L2 | x | x | x | x | |
| 3 | A L3 | x | x | x | x | |
| 4 | var sys | x | x | x | x | sys=system |
| 5 | W sys | x | x | x | x | sys=system |
| 6 | Phase seq. | x | x | x | x | |
| 7 | kWh | x | x | x | x | Total |
| 8 | kvarh | x | x | x | x | Total |

(x) = available

Display pages

Display variables in 3-phase systems with or without neutral




| No | 1 st line | 2 nd line | Phase Sequence | Notes |
|----|----------------------|----------------------|--------------------------------------|-------|
| 1 | Total kWh | kW sys | Warning triangle if reverse sequence | |
| 2 | Total kvarh | kvar sys | Warning triangle if reverse sequence | |
| 3 | AL1 - AL2 | AL3 | Warning triangle if reverse sequence | |

Note: whatever page the user has selected, after 60s it goes back to page 1.



Insulation between inputs and outputs

| | Measuring Inputs | Open collector outputs | Self power supply |
|------------------------|------------------|------------------------|-------------------|
| Measuring Inputs | - | 4kV | 0kV |
| Open collector outputs | 4kV | - | 4kV |
| Self power supply | 0kV | 4kV | - |

Wiring diagrams

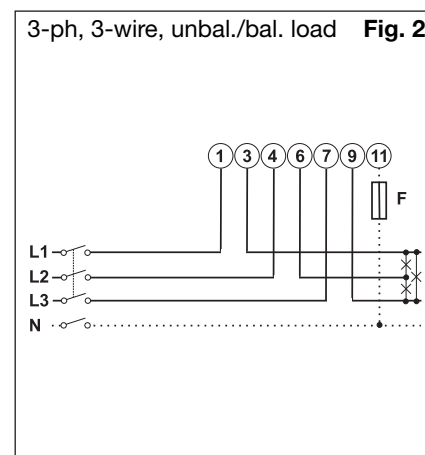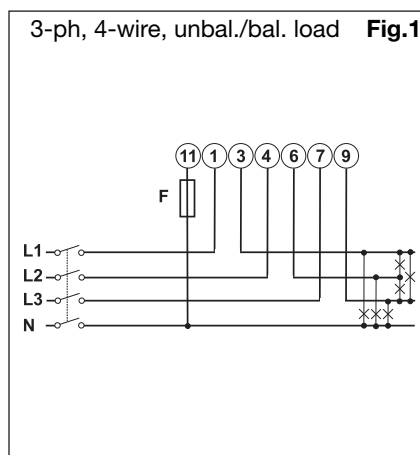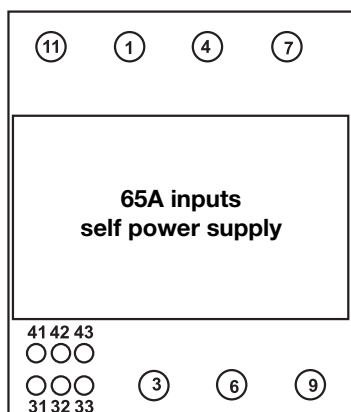


Open collector output wiring diagrams

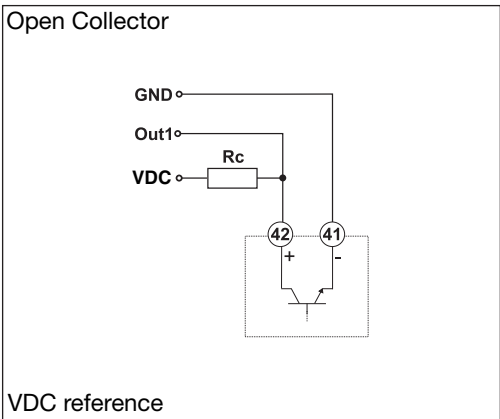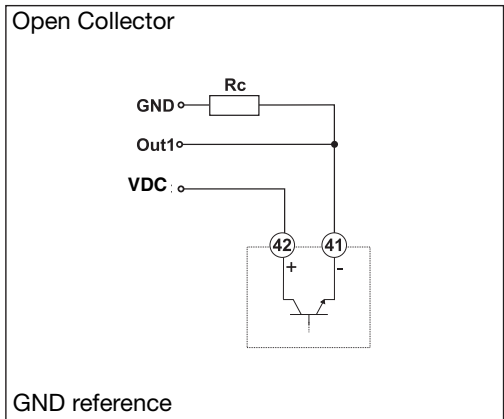

The load resistances (R_c) must be designed so that the close contact current is lower than 100mA; the VDC voltage must be lower than or equal to 30VDC.

Front panel description

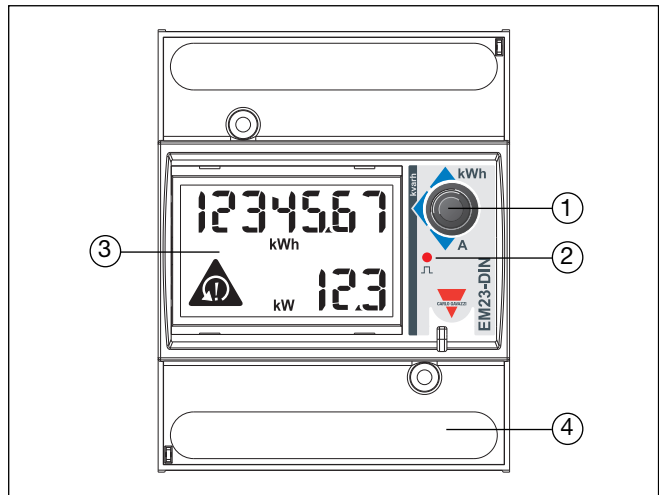

- 1. **Joystick**
To scroll the variables on the display.
- 2. **LED**
Red LED blinking proportional to the energy being measured.
- 3. **Display**
LCD-type with alphanumeric indications to display all the measured variables.
- 4. **Connections**
Screw terminal blocks for instrument wiring.

Dimensions

