

Energy Management

Energy Meter

Type EM10 DIN

CARLO GAVAZZI



- Class 1 (kWh) according to EN62053-21
- Class B (kWh) according to EN50470-3
- Energy meter
- Energy readout: 5+1 DGT
- Energy measurements: total kWh
- TRMS measurements of distorted sine waves (voltages/currents)
- Self power supply
- Dimensions: 1-DIN module
- Protection degree (front): IP40
- 1 pulse output on request
- Certified according to MID Directive, Annex "B" "Type examination" relevant to active electrical energy meters (see Annex MI-003), see option "P" below
- Certified according to MID Directive, Annex "B" + Annex "F" for legal metrology relevant to active electrical energy meters (see Annex MI-003), see option "PF" below.

Product Description

One-phase energy meter with LCD data displaying; indicated for active energy metering. Housing for DIN-rail mounting, IP40 (front) protection degree. Direct

connection up to 32A. Moreover the meter can be provided with pulse output proportional to the active energy being measured.

How to order EM10 DIN AV8 1 X 01 P

Model _____
 Range code _____
 System _____
 Power supply _____
 Output _____
 Option _____

Type Selection

Range code	System	Power supply	Option
AV7: 120V _{LN} AC - 5(32)A (**) (direct connection)	1: 1-phase	X: Self power supply (from 48 to 62Hz). The instrument works on the range from -20% to +20% of the measuring nominal input voltage.	P: Certified according to MID Directive, Annex "B" "Type examination" relevant to active electrical energy meters (see Annex MI-003) (*)
AV8: 230V _{LN} AC - 5(32)A (*) (direct connection)	Output		PF: Certified according to MID Directive, Annex "B" + Annex "F" for legal metrology relevant to active electrical energy meters (see Annex MI-003) (**)
(*) as standard. (**) on request, the range is available but not in compliance with the MID	01: Pulse type (open collector output) (*)		X(**): AV7 range is not in compliance with the MID directive

Input specifications

Rated inputs Current range (by shunt) Voltage range	System: 1 AV7 and AV8: 5(32)A AV7: 120 VLN AC (The option "P" is not available) AV8: 230 VLL AC	Active energy	Class 1 according to EN62053-21 and Class B according to EN50470-3. MID (Annex MI-003) Class B. Ib: 5A, Imax: 32A, 0.1 Ib: 0.5A 20mA
Accuracy (Display) (@25°C ±5°C, R.H. ≤60%, 48 to 62Hz) AV7 model	Ib: 5A, Imax: 32A; Un: 120VLN (-20% +20%)	Reference values	
AV8 model	Ib: 5A, Imax: 32A; Un: 230VLN (-20% +20%)	Start up current:	
		Energy additional errors Influence quantities	According to EN62053-21,
		Temperature drift	≤200ppm/°C
		Sampling rate	4096 samples/s @ 50Hz 4096 samples/s @ 60Hz

Input specifications (cont.)

Display	1 line (max: 5+1 DGT)	Current Overload	
Type	LCD, h 7mm	Continuous	32A, @ 50Hz
Energie indication	Total: 5+1 DGT	For 10ms	960A, @ 50Hz
LEDs	Red LED (Energy consumption), 1000 pulses/kWh (Max Frequency 16 Hz) according to EN62053-11	Voltage Overload	
		Continuous	1.2 Un
		For 500ms	2 Un
Measurements	kWh from 0,0 to 99999,9	Input impedance	
Method	TRMS measurements of distorted wave forms	120VL-N (AV7)	>720KΩ
Coupling type	Direct	230VL-N (AV8)	>720KΩ
Crest factor	1b 5A ≤4 (45A max. peak)	5(32) A (AV7-AV8)	< 0.5VA
		Frequency	48 to 62 Hz

Output specifications

Digital output	(on request)		
Number of outputs	1		
Type	Open collector, 1000 pulses/kWh.	Insulation	≥120ms (OFF), according to EN62052-31
Signal	V _{ON} 1.2 VDC/ max. 100 mA		By means of optocouplers, 4000 VRMS output to measuring inputs
Pulse duration	V _{OFF} 30 VDC max. ≥100ms < 120msec (ON),		

General specifications

Operating temperature	-25°C to +55°C (-13°F to 131°F) (R.H. from 0 to 90% non-condensing @ 40°C) according to EN62053-21, EN50470-1 and EN62053-23	Surge	On current and voltage measuring input circuits: 4kV; According to CISPR 22
Storage temperature	-30°C to +70°C (-22°F to 158°F) (R.H. < 90% non-condensing @ 40°C) according to EN62053-21, EN50470-1 and EN62053-23	Radio frequency suppression	
Installation category	Cat. III (IEC60664, EN60664)	Standard compliance	
Insulation (for 1 minute)	4000 VRMS between measuring inputs and digital output (O1).	Safety	IEC60664, IEC61010-1 EN60664, EN61010-1 (EN62052-11) EN50470-1 EN62053-21, EN62053-23, EN50470-3
Dielectric strength	4000 VRMS for 1 minute	Metrology	MID "annex MI-003"
CMRR Noise rejection	100 dB, 48 to 62 Hz	Pulse output Approvals	DIN43864, IEC62053-31 CE, MID according to "ANNEX B" (EC type certificate)
EMC	According to EN62052-11	Connections	
Electrostatic discharges	8kV air discharge;	Cable cross-section area	Screw-type Min. 2.5 mm ² , Max. 10 mm ² (measuring inputs); Min./Max. screws tightening torque: 0.5 Nm / 1.1 Nm Other terminals: 1.5 mm ² Min./Max. screws tightening torque: 0.4 Nm/0.8 Nm
Immunity to irradiated electromagnetic fields	Test with applied current: 10V/m from 80 to 2000MHz; Test without any applied current: 30V/m from 80 to 2000MHz;	DIN Housing	
Burst	On current and voltage measuring input circuits: 4kV	Dimensions (WxHxD)	17.5 x 90 x 67.5 mm
Immunity to conducted disturbances	10V/m from 150KHz to 80MHz	Material	Nylon PA66, self-extinguishing: UL 94 V-0
		Mounting	DIN-rail
		Protection degree	
		Front	IP40
		Screw terminals	IP20
		Weight	Approx. 100 g (packing included)

Power supply specifications

Self supplied version

120VLN, 230 VLN (-20%
+20%) 48-62Hz

Power consumption

≤ 3VA

MID "Annex MI-003" compliance

Accuracy

$0.9 U_n \leq U \leq 1.1 U_n$;
 $0.98 f_n \leq f \leq 1.02 f_n$;
 f_n : 50 or 60Hz;
 $\cos\phi$: 0.5 inductive to
 0.8 capacitive.
 Class B
 I_{st} : 0.02A;
 I_{min} : 0.25A;
 I_{tr} : 0.64A;
 I_{ref} : 5A;
 I_{max} : 32A.

Operating temperature

-25°C to +55°C (-13°F to
131°F) (R.H. from 0 to 90%
non-condensing @ 40°C)

EMC compliance

E2

Used calculation formula

Energy metering

$$kWh_i = \int_{n_1}^{n_2} P_i(t) dt \cong \Delta t \sum_{n=1}^{n_2} P_{nj}$$

Where:

i= considered phase (L1)

P= active power;

t₁, t₂ =starting and ending time points
of consumption recording;


n= time unit;

Δt= time interval between two
successive power consumptions;

n₁, n₂ = starting and ending discrete
time points of consumption recording

Accuracy according to EN50470-3


kWh, accuracy (RDG) depending on the current

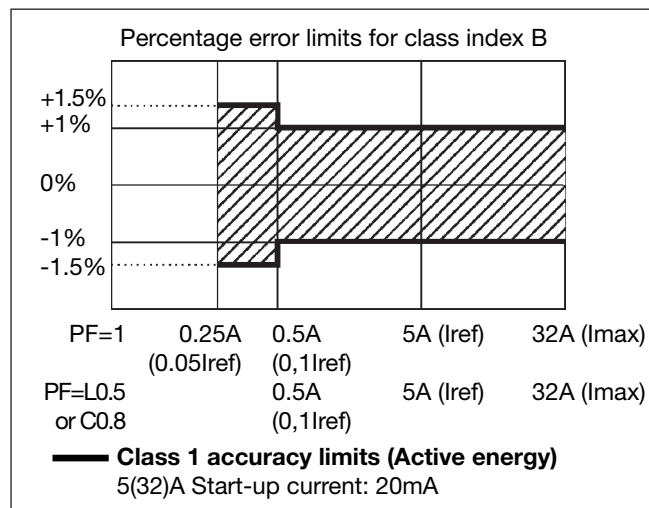

Insulation between inputs and outputs

	Measuring inputs	Open collector output	AC self-power supply
Measuring inputs	-	4kV	0kV
Open collector output	4kV	-	4kV
AC self-power supply	0kV	4kV	-


Wiring diagram and open collector output (O1)

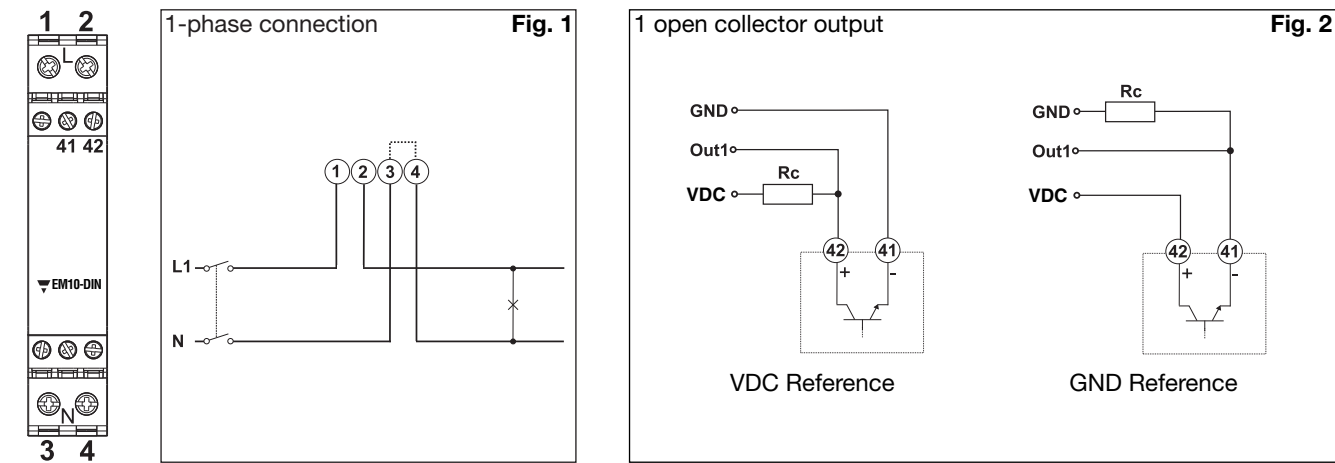

NOTE: The 3 and 4 terminals, in the instrument, are wired together

The load resistances (RC) must be designed so that the close contact current is lower than 100mA; the VDC voltage must be lower than or equal to 30VDC.

Frontal panel description and tamper proof

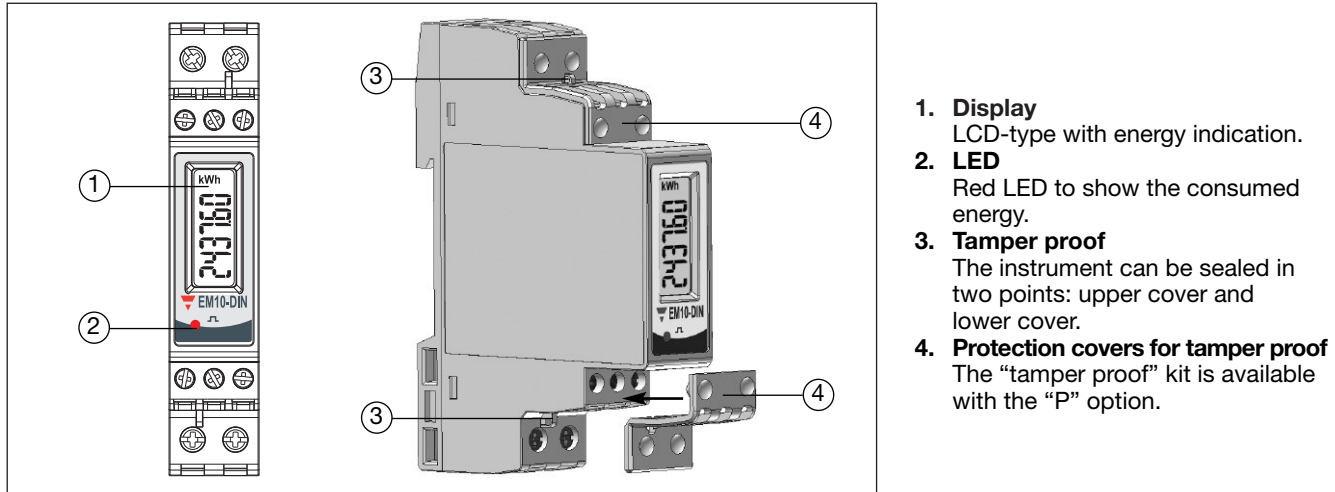

Dimensions and panel cut-out

